



# K-WV 3/2 STECK SCHL GEW 2

3/2-way pilot valves with male thread and plug connection, tube to flow direction from port, conical male thread, coated

**HANSA FLEX**

## Właściwości

|                             |  |
|-----------------------------|--|
| Ciśnienie pracy             | Max. 15 bar, coarse vacuum   |
| Zakres stosowania           | Air, vacuum  |
| zalecane węże               | PU or PA (nylon)   |
| Czynniki robocze            | Compressed air and all gases or liquids that are compatible with the materials |
| Zakres temperatury          | -20 °C to +80 °C   |
| Powierzchnia uszczelniająca | Parallel version: O-ring in housing, Conical version: thread coating           |
| Materiał                    | Plastic, Nickel plated brass   |
| pierścień dociskowy         | Plastic  |

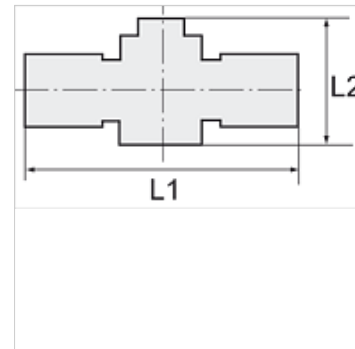

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artykuł

| Oznaczenie     | Gwint | do średnicy zewnętrznej węża Ø mm | L1 (mm) | L2 (mm) | RK    |
|----------------|-------|-----------------------------------|---------|---------|-------|
| K- 07 40 46 13 | R 1/8 | 6 mm                              | 58,3    | 41,5    | 12 mm |
| K- 07 40 46 14 | R 1/8 | 8 mm                              | 58,9    | 41,5    | 14 mm |
| K- 07 40 46 11 | R 1/4 | 6 mm                              | 60,8    | 41,5    | 14 mm |
| K- 07 40 46 12 | R 1/4 | 8 mm                              | 60,9    | 41,5    | 14 mm |
| K- 07 40 46 09 | R 1/4 | 10 mm                             | 72,6    | 46,0    | 17 mm |
| K- 07 40 46 10 | R 1/4 | 12 mm                             | 73,3    | 46,0    | 21 mm |
| K- 07 40 46 19 | R 3/8 | 6 mm                              | 62,3    | 41,5    | 17 mm |
| K- 07 40 46 20 | R 3/8 | 8 mm                              | 62,4    | 41,5    | 17 mm |
| K- 07 40 46 17 | R 3/8 | 10 mm                             | 73,6    | 46,0    | 17 mm |
| K- 07 40 46 18 | R 3/8 | 12 mm                             | 74,1    | 46,0    | 21 mm |
| K- 07 40 46 07 | R 1/2 | 10 mm                             | 77,1    | 46,0    | 21 mm |
| K- 07 40 46 08 | R 1/2 | 12 mm                             | 77,3    | 46,0    | 21 mm |