
K-RD STUECKE PP

Reducers

Właściwości

Ciśnienie pracy	on request
Temperatura robocza	Max. +20 °C
Materiał	Polypropylene (PP)
Materiał uszczelniający	NBR



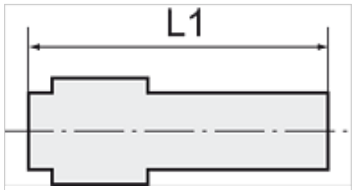

Wskazówka

Dalsze informacje na zapytanie.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artykuł

Oznaczenie	do średnicy zewnętrznej węża Ø mm	L1 (mm)	króciec (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.