


K-VSTO PP

Plugs

Właściwości

| | |
|-------------------------|--------------------|
| Ciśnienie pracy | on request |
| Temperatura robocza | Max. +20 °C |
| Materiał | Polypropylene (PP) |
| Materiał uszczelniający | NBR |

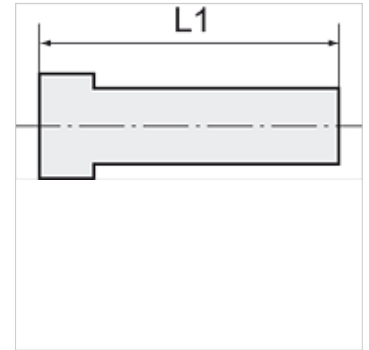

Wskazówka

Dalsze informacje na zapytanie.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artykuł

| Oznaczenie | L1 (mm) | króciec (mm) |
|----------------|------------|-----------------|
| K- 07 40 29 21 | 102,0 | 32 |