

K-STECKVERBINDU RED

Reducers

Właściwości

Ciśnienie pracy	Max. 16 bar
Temperatura robocza	-20 °C to +150 °C
Materiał	mosiądz niklowany
pierścień dociskowy	Nickel-plated brass
pierścień zaciskowy	Stainless steel



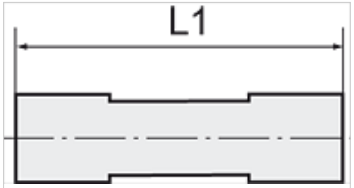

Wskazówka

Dalsze informacje na zapytanie.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artykuł

Oznaczenie	do średnicy zewnętrznej węża Ø mm	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.