
K-ABLASSVENTIL AUTO

Fully-automatic drain valve with Adapter G 1/8

Właściwości

Ciśnienie robocze	min. 4 bar, max. 16 bar
Czynniki robocze	Condensate (emulsion)
przyłącze zbiornika	G 1/8 male
Temperatura robocza	0 °C to +90 °C
Położenie montażowe	Bowl mounted– vertical ± 10%
Materiał	Hood :aus Messing, Gehäuse aus Kunststoff (PA)



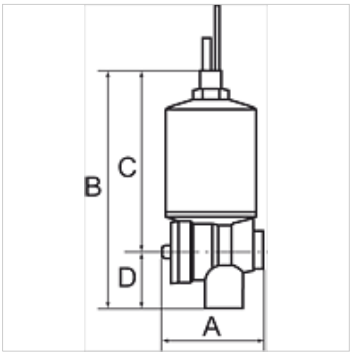

Wskazówka

Dalsze informacje na zapytanie.

Opis

For all size G 1/4 or larger filters, filter regulators, service units and combined units. Not suitable for our miniature Series nor for the »multifix« Series. Easier to mount than the standard manual drain valve.

Artykuł

Oznaczenie	gwint strona spustu	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 16 13	G 1/4 female	46,5	109,0 mm	83,0	26,0	4

jest częścią zamienną do następujących produktów

K-FI REGL PC-BEHAEL MANO VARIOBLOC	Filter regulators with polycarbonate bowl and pressure gauge
K-FI REGL METALLBEHAE S MANO VARIOB	Filter regulators with metal bowl, incl. sight glass and pressure gauge
K-FI PC-BEHAELTER VARIOBLOC	Filters with polycarbonate bowl
K-FI METALLBEHAELTER SICHT VARIBLOC	Filters with metal bowl incl. sight glass
K-FI MIKRO PC-BEHAELTER VARIOBLOC	Micro-filters with polycarbonate bowl
K-FI MIKRO METALLBEH SICHT VARIOBLO	Micro-filters with metal bowl, incl. sight glass
K-WTEH 3-TLG PC-BEHAEL VARIOBLOC	Service units, 3-piece with polycarbonate bowl
K-WTEH 3-TLG MET SICH TROPF VARIOBL	Service units, 3-piece with metal bowl, incl. sight glass and metal sight dome
K-WTEH 2-TLG PC-BEHAEL VARIOBLOC	Service units, 2-piece with polycarbonate bowl
K-WTEH 2-TLG MET SICH TROPF VARIOBL	Service units, 2-piece with metal bowl, incl. sight glass and metal sight dome
K-FI REGL PC-BEHAEL H ABLV STANDARD	Filter regulators with polycarbonate bowl and semi-automatic drain valve
K-FI REGL PC-BEHAEL S H ABL STANDAR	Filter regulators with polycarbonate bowl, bowl guard and semi-automatic drain valve
K-FI REGL METALLBEHAE M ABLV STANDA	Filter regulators with metal bowl and manual drain valve
K-FI PC-BEHAELTER H ABLV STANDARD	Filters with polycarbonate bowl and semi-automatic drain valve
K-FI PC-BEHAELTER S H ABLV STANDARD	Filters with polycarbonate bowl, bowl guard and semi-automatic drain valve
K-FI METALLBEHAELTER M ALV STANDARD	Filters with metal bowl and manual drain valve
K-WTEH 2-TLG PC H ABLV STANDARD	Service units with polycarbonate bowl and semi-automatic drain valve
K-WTEH 2-TLG PC SCHU H ABL STANDARD	Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve
K-WTEH 2-TLG MET M ABLV TRO STANDAD	Service units with metal bowl and manual drain valve, metal sight dome
K-WTEH 3-TLG PC H ABLV STANDARD	Service units with polycarbonate bowl and semi-automatic drain valve
K-WTEH 3-TLG PC SCHU H ABL STANDARD	Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve
K-WTEH 3-TLG MET M ABLV TRO STANDAD	Service units with metal bowl and manual drain valve, metal sight dome
K-WTEH KOMBI PC-BEHAELTER S H ABLV	Combination service units with polycarbonate bowl, bowl guard and manual drain valve

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.