


K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX

Właściwości

Ciśnienie pracy	on request
Temperatura robocza	Max. +20 °C
Materiał	Polypropylene (PP)
Materiał uszczelniający	NBR

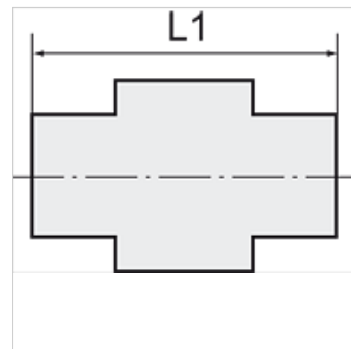

Wskazówka

Dalsze informacje na zapytanie.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artykuł

Oznaczenie	Gwint	do średnicy zewnętrznej węża Ø mm	L1 (mm)	RK
K- 07 40 28 39	G 1	32 mm	111,4	46 mm
K- 07 40 28 40	G 1 1/2	32 mm	109,2	49 mm