

# K-VST 1
Plugs

HANSA-FLEX

## Właściwości

| | |
|---|---|
| **Ciśnienie pracy** | Max. 16 bar |
| **Temperatura robocza** | -20 °C to +80 °C |
| **Materiał** | mosiądz niklowany |



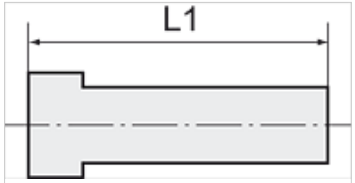


## Wskazówka

Dalsze informacje na zapytanie.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artykuł

| Oznaczenie | złączka wtykowa (mm) | L1 (mm) |
|---|---|---|
| **K- 07 40 26 28** | 3 | 20,0 |
| **K- 07 40 26 29** | 4 | 27,0 |
| **K- 07 40 26 30** | 5 | 27,0 |
| **K- 07 40 26 33** | 6 | 29,8 |
| **K- 07 40 26 36** | 8 | 33,6 |
| **K- 07 40 26 37** | 10 | 36,8 |
| **K- 07 40 26 38** | 12 | 39,0 |
| **K- 07 40 26 40** | 14 | 39,5 |

*Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.*