
# K-T-STECK VB 1

Union tees

## Właściwości

| | |
|---|---|
| **Ciśnienie pracy** | Max. 16 bar |
| **Temperatura robocza** | -20 °C to +150 °C |
| **Materiał** | mosiądz niklowany |
| **pierścień dociskowy** | Nickel-plated brass |
| **pierścień zaciskowy** | Stainless steel |



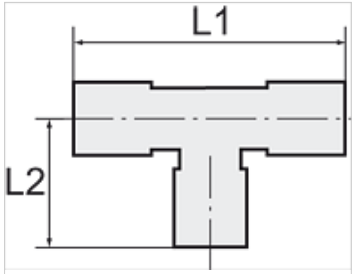


## Wskazówka

Dalsze informacje na zapytanie.

## Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artykuł

| Oznaczenie | do średnicy zewnętrznej węża Ø mm | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 27 57** | 4 mm | 34,0 | 17,0 |
| **K- 07 40 27 58** | 6 mm | 39,0 | 19,5 |
| **K- 07 40 27 59** | 8 mm | 46,0 | 23,0 |
| **K- 07 40 27 60** | 10 mm | 50,0 | 25,0 |
| **K- 07 40 47 81** | 12 mm | 54,0 | 27,0 |
| **K- 07 40 47 82** | 14 mm | 62,0 | 31,0 |

*Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.*