

UEM AJ VA

Porca AJ

HANSA FLEX



Características

Conexão 1 Rosca interna UN/UNF

Tipo Porca

Norma ISO 8434-2

Material Aço inoxidável

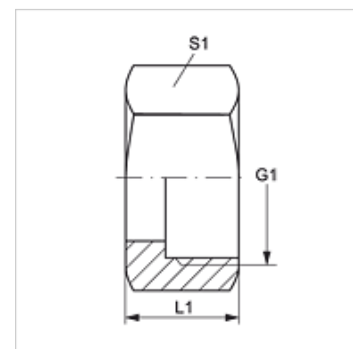

Artigo

| Descrição | G1 | S1 | L1 (mm) |
|--------------|----------------|----|------------|
| UEM AJ 04 VA | 7/16" -20 UNF | 14 | 16,0 |
| UEM AJ 05 VA | 1/2" -20 UNF | 17 | 17,0 |
| UEM AJ 06 VA | 9/16" -18 UNF | 19 | 18,0 |
| UEM AJ 08 VA | 3/4" -16 UNF | 22 | 21,0 |
| UEM AJ 10 VA | 7/8" -14 UNF | 27 | 25,0 |
| UEM AJ 12 VA | 1.1/16" -12 UN | 32 | 26,0 |
| UEM AJ 16 VA | 1.5/16" -12 UN | 41 | 28,0 |
| UEM AJ 20 VA | 1.5/8" -12 UN | 50 | 31,0 |
| UEM AJ 24 VA | 1.7/8" -12 UN | 60 | 36,0 |

Variantes do produto

UEM AJ Porca AJ, Aço