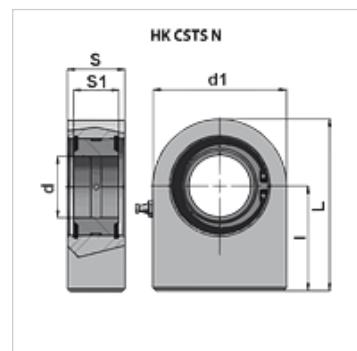
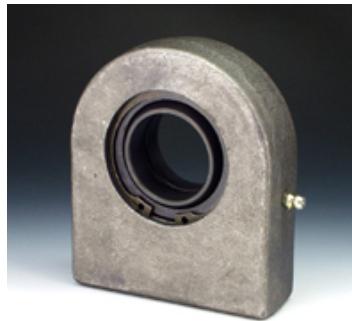


**Características**

<b>Norma</b>	DIN 648, SÉRIE E. TIPO N
<b>Campo de aplicação</b>	Indústria
<b>Material</b>	Aço ST 52.3

**Nota**

HKCSTS09N00 não pode ser relubrificado

**Artigo**

Descrição	d (mm)	d1 (mm)	l (mm)	L (mm)	S1 (mm)	S (mm)	carga dinâmica admissível (kN)	Peso (kg)
<b>HK CSTS 016 N 00</b>	16	48	35	59,0	14	18	21	0,29
<b>HK CSTS 020 N 00</b>	20	50	38	63,0	16	19	30	0,35
<b>HK CSTS 025 N 00</b>	25	55	45	72,5	20	23	48	0,53
<b>HK CSTS 030 N 00</b>	30	65	51	83,5	22	28	62	0,85
<b>HK CSTS 035 N 00</b>	35	83	61	102,5	25	30	80	1,50
<b>HK CSTS 040 N 00</b>	40	100	69	119,0	28	35	100	2,48
<b>HK CSTS 045 N 00</b>	45	110	77	132,0	32	40	127	3,45
<b>HK CSTS 050 N 00</b>	50	123	88	149,5	35	40	156	4,45
<b>HK CSTS 060 N 00</b>	60	140	100	170,0	44	50	245	7,10
<b>HK CSTS 070 N 00</b>	70	164	115	197,0	49	55	315	10,70
<b>HK CSTS 080 N 00</b>	80	180	141	231,0	55	60	400	15,10
<b>HK CSTS 090 N 00</b>	90	226	150	263,0	60	65	490	15,10