
# K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

## Características

| | |
|---|---|
| **Pressão operacional** | max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C) |
| **Acoplamento** | High quality hand quick release coupling of steel for high flow rates<br>For demanding applications with high mechanical wear |
| **Mangueira de espiral** | Polyurethane |

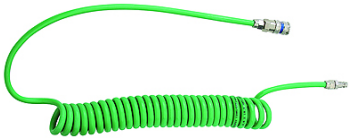

## Nota

Outras indicações a pedido.

## Descrição

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

## Artigo

| Descrição | Dimensão da mangueira | Ø Espiral (mm) | Comprimento de trabalho (m) |
|---|---|---|---|
| **K- 07 10 07 56** | 10 mm x 6,5 mm | 52 | 4,0 |
| **K- 07 10 07 57** | 10 mm x 6,5 mm | 52 | 6,0 |
| **K- 07 10 07 58** | 12 mm x 8 mm | 65 | 8,0 |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*