
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Características

Características	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Aplicação	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Carcaça	Aluminium eloxed (type VR)
Sistema do bocal	Brass (type VR)
Conexão	Conexão de encaixe



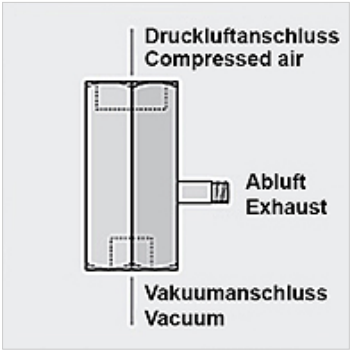

Nota

Outras indicações a pedido.

Descrição

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artigo

Descrição	Tamanho do bocal	Conexão de saída de ar	Conexão de ar comprimido	Conexão de vácuo	Grau de evacuação	Consumo de ar Aspirar (L/min)	Capacidade de aspiração máx. (L/min)	Comprimento (mm)	Pressão operacional (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.