

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Características

Aplicação	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Características especiais	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

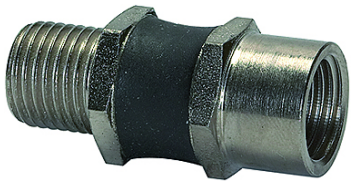

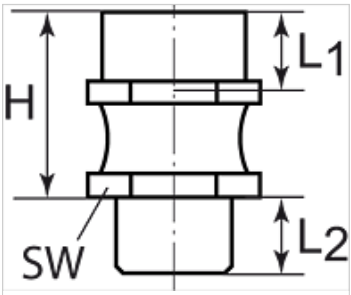

Nota

Outras indicações a pedido.

Descrição

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artigo

Descrição	Rosca 1 interna	Rosca 2 externa	H (mm)	Material	L1 (mm)	L2 (mm)	Ângulo W (°)	Carga vertical (N/m2)	Momento de flexão (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.