


Características

| | |
|---------------------|---|
| Pressão operacional | Max. 40 bar |
| Rosca Descrição | With inside cone for ball-type hose fitting |
| Carcaça | Brass |
| Volante | Plastic |
| Fuso | With stainless steel ball |

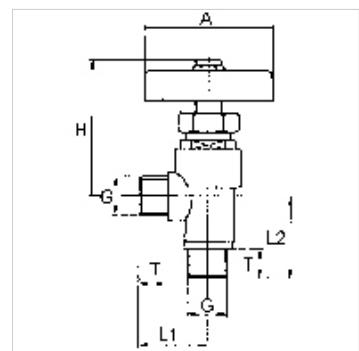

Nota

Outras indicações a pedido.

Artigo

| Descrição | DN | Rosca | A (mm) | H (mm) | L1 (mm) | L2 (mm) | SW (mm) | T (mm) |
|---------------|----|-------|-----------|-----------|------------|------------|------------|-----------|
| K-07 30 12 49 | 6 | G 1/4 | 48,0 | 45,0 | 25,0 | 27,0 | 19 | 11,0 |
| K-07 30 12 50 | 8 | G 3/8 | 48,0 | 45,0 | 25,0 | 27,0 | 19 | 11,0 |