
K-MV G 230 V, 50 - 60 HZ IV

Normally closed, 230 V / 50 to 60 Hz, internal pilot control

Características

Conexão elétrica	ISO 4400 (Pg 11P connector socket)
Tipo de proteção	IP65 (with connector socket fitted)
Temperatura do fluido	max. +90 °C
Pressão operacional	min. 0,35 bar; max. 8,5 bar
Conexão de purga no modelo 2	G 3/8 (K-07302231 und K-07302304), G 3/4 (K-07302232 und K-07302305, \ nK-07302233 und K-07302306), Silencers can be retrofitte
Carcaça	Aluminium
Peças interiores	Stainless steel
Membrana	Type 1 TPE (Hydrel); Type 2 CR (chlorophene/neoprene)
Vedação	Perbunan (NBR)



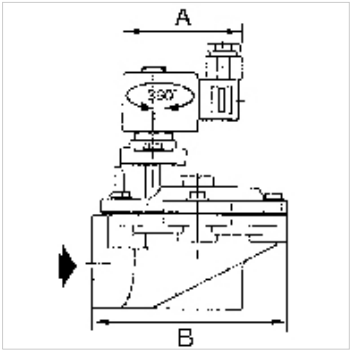

Nota

Outras indicações a pedido.

Descrição

Environmental protection today demands state-of-the-art cleaning processes. Dust filter systems are an indispensable aid to pollution control. The fabric filters installed in these systems are cleaned by blowing in compressed air pulses in quick succession counter to the main direction of flow. The solenoid valves used for this purpose are characterised by the following application-specific design features:

- Angle type of construction to optimise the air flow
- Full cross-section at the valve seat
- Extremely fast opening and closing
- Quiet operation thanks to built-in silencers (can be retrofitted in sizes 1 1/2- to 2 1/2)
- Easy maintenance and repair because diaphragm and wearing parts are instantly available

The valves are not suitable as shut-off devices for standard applications.

Artigo

Descrição	Rosca	NW	A (mm)	B (mm)	Modelo
K- 07 30 22 29	G 3/4	25,0	75,0	89,0	1
K- 07 30 22 30	G 1	25,0	75,0	89,0	1
K- 07 30 22 31	G 1 1/2	52,0	80,0	130,0	2
K- 07 30 22 32	G 2	66,0	80,0	168,0	2
K- 07 30 22 33	G 2 1/2	66,0	80,0	168,0	2

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.