


K-MV G D 230 V, 50 - 60 HZ

Normally closed, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Características

Conexão elétrica	ISO 4400. cable socket (Pg 11P)
Tipo de proteção	IP65 (with connector socket fitted)
Temperatura do fluido	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Rosca Descrição	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Carcaça, assento de válvula	Brass
Peças interiores	Stainless steel
Vedação	Perbunan (NBR) or FKM

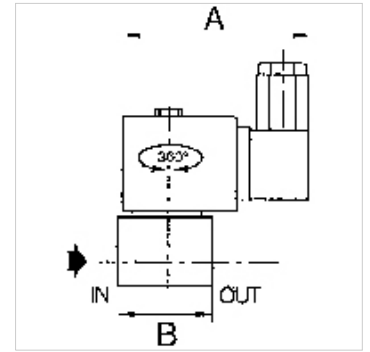

Nota

Outras indicações a pedido.

Descrição

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artigo

Descrição	Rosca	Pressão operacional máx. (bar)	NW	Material de vedação	A (mm)	B (mm)	Modelo
K- 07 30 22 35	G 1/8	12	3,2	NBR	75,0	30,0	1
K- 07 30 22 37	G 1/8	12	3,2	FKM	75,0	30,0	1
K- 07 30 22 36	G 1/4	11	3,2	NBR	75,0	40,0	2
K- 07 30 22 38	G 1/4	11	3,2	FKM	75,0	40,0	2