


K-MV G V 24 V DC

Normally closed, pilot-operated, 24 V DC (direct current)

HANSA FLEX

Características

| | |
|-----------------------------|--------------------------------------------------------------|
| Conexão elétrica | ISO 4400. cable socket (Pg 11P) |
| Tipo de proteção | IP65 (with connector socket fitted) |
| Temperatura do fluido | max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal |
| Rosca Descrição | G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1 |
| Carcaça, assento de válvula | Brass |
| Peças interiores | Stainless steel |
| Vedação | Perbunan (NBR) or FKM |

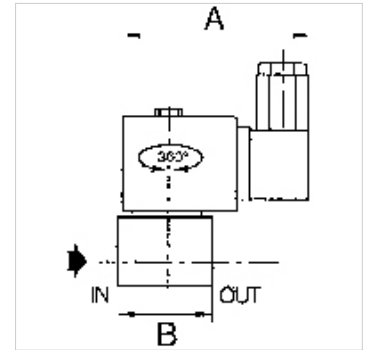

Nota

Outras indicações a pedido.

Descrição

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artigo

| Descrição | Rosca | Pressão operacional máx. (bar) | Pressão de serviço mín (bar) | NW | Material de vedação | A (mm) | B (mm) | Modelo |
|----------------|----------|--------------------------------|------------------------------|------|---------------------|--------|--------|--------|
| K- 07 30 23 24 | Rp 3/8 | 9 | 0,35 | 16,0 | NBR | 80,0 | 70,0 | 3 |
| K- 07 30 23 30 | Rp 3/8 | 9 | 0,35 | 16,0 | FKM | 80,0 | 70,0 | 3 |
| K- 07 30 23 91 | Rp 1/2 | 9 | 0,35 | 16,0 | NBR | 80,0 | 70,0 | 3 |
| K- 07 30 23 31 | Rp 1/2 | 9 | 0,35 | 16,0 | FKM | 80,0 | 70,0 | 3 |
| K- 07 30 23 25 | Rp 3/4 | 7 | 0,35 | 19,0 | NBR | 80,0 | 71,0 | 3 |
| K- 07 30 23 32 | Rp 3/4 | 7 | 0,35 | 19,0 | FKM | 80,0 | 71,0 | 3 |
| K- 07 30 23 26 | Rp 1 | 9 | 0,35 | 25,0 | NBR | 80,0 | 95,0 | 4 |
| K- 07 30 23 33 | Rp 1 | 9 | 0,35 | 25,0 | FKM | 80,0 | 95,0 | 4 |
| K- 07 30 23 27 | Rp 1 1/4 | 9 | 0,35 | 28,0 | NBR | 80,0 | 95,0 | 4 |
| K- 07 30 23 34 | Rp 1 1/4 | 9 | 0,35 | 28,0 | FKM | 80,0 | 95,0 | 4 |
| K- 07 30 23 28 | Rp 1 1/2 | 9 | 0,35 | 32,0 | NBR | 80,0 | 111,0 | 5 |
| K- 07 30 23 35 | Rp 1 1/2 | 9 | 0,35 | 32,0 | FKM | 80,0 | 111,0 | 5 |
| K- 07 30 23 29 | Rp 2 | 3 | 0,35 | 44,0 | NBR | 80,0 | 129,0 | 5 |