


### Características

<b>Pressão operacional</b>	máx. 10 bar
<b>Rosca Descrição</b>	Rp thread acc. to DIN 2999
<b>Temperatura do fluido</b>	max. +80 °C
<b>Pressão de abertura</b>	min. 0.5 bar
<b>Temperatura ambiente</b>	Max. +80 °C
<b>Material de vedação</b>	NBR
<b>Carcaça</b>	Brass

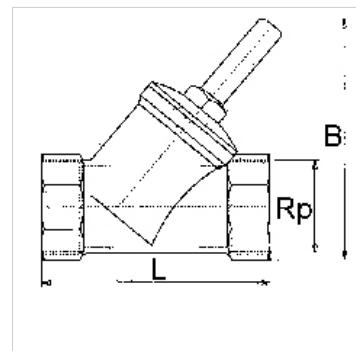

### Nota

Outras indicações a pedido.

### Artigo

Descrição	Rosca	B (mm)	L (mm)	SW (mm)
K-07 30 24 75	Rp 3/8	50,0	55,0	27
K-07 30 24 76	Rp 1/2	50,0	59,0	27
K-07 30 24 77	Rp 3/4	60,0	67,0	32
K-07 30 24 78	Rp 1	71,0	83,0	38
K-07 30 24 79	Rp 1 1/4	97,0	96,0	48
K-07 30 24 80	Rp 1 1/2	114,0	106,0	54
K-07 30 24 81	Rp 2	135,0	130,0	68