


### Características

Pressão diferencial	0 - 16 bar
Temperatura do fluido	-10 °C to +180 °C
Conexão de ar de controle	G 1/8
Temperatura do fluido de controle	max. +60 °C
Temperatura ambiente	-20 °C to +70 °C
Pressão estática permitida	Max. 16 bar
Carcaça da válvula	Stainless steel AISI 316
Peça de ligação	Stainless steel
Cabeçote de controle	Polyamide (glass fibre-reinforced)
Êmbolo	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Fuso	Stainless steel
Material de vedação	PTFE

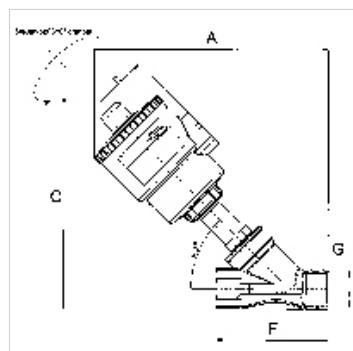

### Nota

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Outras indicações a pedido.

### Descrição

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design. Water hammer prevented by fluid entry under the disc. Suitable for vacuum operation (low vacuum). NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

### Informações adicionais

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

### Artigo

Descrição	A (mm)	C (mm)	F (mm)	Rosca	Diferença máx. de pressão de serviço (bar)	Pressão de controle mín.	Pressão de controle máx.
K-07 30 25 33	190,0	169,0	85,0	G 1/2	16	4	10
K-07 30 25 34	195,0	176,0	95,0	G 3/4	10	4	10
K-07 30 25 35	213,0	195,0	95,0	G 3/4	16	4	10
K-07 30 25 36	219,0	202,0	105,0	G 1	11	4	10