

K-T-TUE
Tee hose connectors

Características

Pressão operacional	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Corpo da união roscada	Polyamide (PA)
Anel de aperto	Polypropylene (PP)
Porca	Polypropylene (PP)



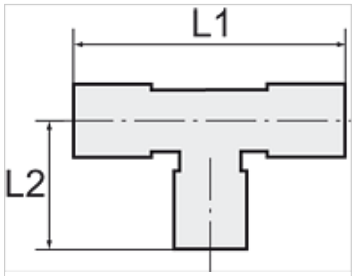

Nota
Outras indicações a pedido.

Descrição
Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Artigo

Descrição	para mangueira	L1 (mm)	L2 (mm)
K- 07 40 32 70	4 mm / 6 mm	52,0	26,0
K- 07 40 32 71	6 mm / 8 mm	62,0	31,0
K- 07 40 32 72	8 mm / 10 mm	72,0	36,0
K- 07 40 32 73	9 mm / 12 mm	80,0	40,0

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.