


# K-FI REGL H ABLV VA

Filter regulators

**HANSA FLEX**

## Características

Pressão de entrada	Max. 30 bar
Temperatura do fluido	max. 130 °C
Temperatura ambiente	Max. 60 °C
Fluxo	2500 l/min
Dimensão dos poros no elemento filtrante	50 µm
Material de vedação	FKM
Membrana	PTFE on NBR base
Material	Aço inoxidável 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Medição do valor de fluxo	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

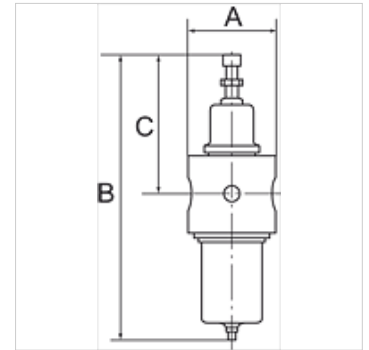

## Nota

Outras indicações a pedido.

## Descrição

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

## Instruções de encomenda

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

## Artigo

Descrição	Rosca	Faixa de regulação	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

## Acessório para

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts