


K-DRG MANO HANSA

Pressure regulators

HANSA FLEX

Características

| | |
|---------------------------|---|
| Pressão de entrada | Max. 16 bar |
| Faixa de temperatura | -10 °C to +50 °C |
| Fluidos | Ar comprimido |
| Rosca de conexão | Material: Die-cast zinc |
| Carcaça | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Consumo de ar próprio | Max. 1.5 l/min (depending on secondary pressure) |
| Medição do valor de fluxo | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

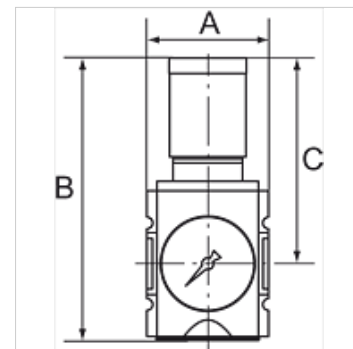

Nota

Outras indicações a pedido.

Descrição

Diaphragm pressure regulators, self-relieving and with excellent flow rates in modern design.
The regulator knob can be latched and locked.

Instruções de encomenda

The price does not include a key lock. Please order separately.

Artigo

| Descrição | Rosca | Faixa de regulação | Fluxo (L/min) | A (mm) | B | C (mm) | Tamanho |
|----------------|-------|--------------------|---------------|--------|----------|--------|---------|
| K- 07 25 02 15 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 16 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 17 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 18 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 19 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 20 | G 1/4 | 0.5 - 16 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 21 | G 3/8 | 0.1 - 1 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 22 | G 3/8 | 0.1 - 2 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 23 | G 3/8 | 0.2 - 4 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 24 | G 3/8 | 0.5 - 8 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 25 | G 3/8 | 0.5 - 10 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 32 | G 3/8 | 0.5 - 16 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 2 |
| K- 07 25 02 33 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 34 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 35 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 36 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 37 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 38 | G 3/8 | 0.5 - 16 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 39 | G 1/2 | 0.1 - 1 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 40 | G 1/2 | 0.1 - 2 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 41 | G 1/2 | 0.2 - 4 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 42 | G 1/2 | 0.5 - 8 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 43 | G 1/2 | 0.5 - 10 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 47 | G 1/2 | 0.5 - 16 bar | 5100 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 44 | G 3/4 | 0.1 - 1 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 45 | G 3/4 | 0.1 - 2 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 46 | G 3/4 | 0.2 - 4 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 48 | G 3/4 | 0.5 - 8 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 49 | G 3/4 | 0.5 - 10 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 50 | G 3/4 | 0.5 - 16 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 26 | G 1 | 0.1 - 1 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 27 | G 1 | 0.1 - 2 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 28 | G 1 | 0.2 - 4 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |



Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.

11.02.2025

HANSA-FLEX AG

www.hansa-flex.com

1

K-DRG MANO HANSA

Pressure regulators

HANSA FLEX

Artigo

| Descrição | Rosca | Faixa de regulagem | Fluxo (L/min) | A (mm) | B | C (mm) | Tamanho |
|----------------|-------|--------------------|---------------|--------|----------|--------|---------|
| K- 07 25 02 29 | G 1 | 0.5 - 8 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 30 | G 1 | 0.5 - 10 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |
| K- 07 25 02 31 | G 1 | 0.5 - 16 bar | 14000 | 85,0 | 191,0 mm | 137,0 | 4 |

Acessórios

K-STECKSCHLOSS Key lock

Acessório para

| | |
|---------------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |