


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Características

| | |
|----------------------------|---|
| Pressão de entrada | 1.5 - 16 bar |
| Pressão de saída | 0.5 - 8 bar |
| Faixa de temperatura | -10 °C to +50 °C |
| Fluidos | Ar comprimido |
| Unidade filtrante | 5,00 µm |
| Rosca de conexão | Material: Die-cast zinc |
| Reservatório | Polycarbonate (with bayonet lock) |
| Elemento filtrante | Cellpor (PE) |
| Carcaça | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Cesto de proteção | Polyamide |
| Acessório para gotejamento | PA |
| Consumo de ar próprio | Max. 1.5 l/min (depending on secondary pressure) |
| Medição do valor de fluxo | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

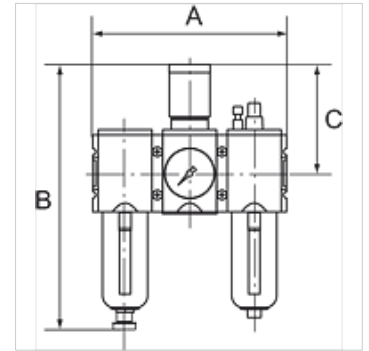

Nota

Outras indicações a pedido.

Descrição

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Instruções de encomenda

The price does not include a key lock. Please order separately.

Artigo

| Descrição | Rosca | Fluxo (L/min) | A (mm) | B | C (mm) | Descarga de condensado |
|----------------|-------|---------------|--------|----------|--------|------------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Acessórios

K-STECKSCHLOSS Key lock

Acessório para

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |