


K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Características

Pressão de entrada	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temperatura do fluido	max. 60 °C
Temperatura ambiente	Max. 60 °C
Material de vedação	NBR
Carcaça	Die-cast zinc, Aluminium for G 1 variant
Acessório para gotejamento	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Manual
Tipo de óleo	CL 32 acc. to DIN 51517 - ISO VG 32
Medição do valor de fluxo	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

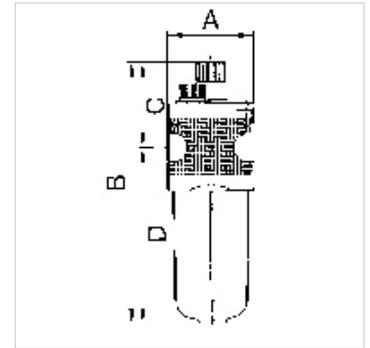

Nota

Outras indicações a pedido.

Descrição

Proportional lubricators, oil can be filled under pressure.

Artigo

Descrição	Rosca	Fluxo (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tamanho
K- 07 25 00 92	G 1/4	1900	47,8	181,3 mm	71,3	110,0	6	1
K- 07 25 00 95	G 3/8	1900	47,8	181,3 mm	71,3	110,0	10	1
K- 07 25 00 98	G 1/2	5000	68,8	213,0 mm	79,3	133,7	15	2
K- 07 25 01 01	G 3/4	5000	68,8	213,0 mm	79,3	133,7	20	2
K- 07 25 01 04	G 1	18000	100,0	322,9 mm	82,7	240,2	25	3

Acessório para

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal