


# K-SCHALTVENTILE 3/2 MULTIFIX MINI

On-off valves (3/2-way valves)

**HANSA FLEX**

## Características

Pressão de entrada	Min. 2 bar, max. 10 bar
Temperatura do fluido	max. 60 °C
Temperatura ambiente	Max. 60 °C
Conexão elétrica	Device plug PG 9, type B, EN 175301-803
Tipo de proteção	IP 65 (P 54) acc. to DIN 40050
Fluxo	1600 l/min
Duração de ativação relativa	100 %
Conexão de purga	Silencer G 1/4
Material de vedação	NBR
Carcaça	Die-cast zinc
Medição do valor de fluxo	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

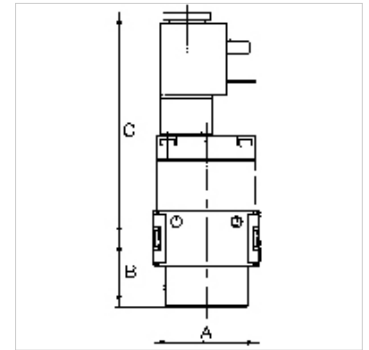

## Nota

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.  
Outras indicações a pedido.

## Descrição

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is relieved at the same time.

## Artigo

Descrição	Rosca	Bobina magnética	A (mm)	B	C (mm)	Tamanho
K- 07 25 11 62	G 1/4	230 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 63	G 1/4	110 V AC, 50 Hz	45,0	29,0 mm	96,0	0
K- 07 25 11 64	G 1/4	24 V DC	45,0	29,0 mm	96,0	0

## Acessório para

K-KOPPELPAKET MEHR	Coupling packet
K-GERAETESTECKER	Coupling socket
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-MAGNETSPULE MULTIFIX	Solenoid
K-SCHALLDAE SINTERBR SCHLITZ	Silencers, sintered bronze, slotted