


# K-WTEH 2-TLG MET TROPF MULTIFIX MIN

Service units, 2-piece with metal bowl and metal sight dome

**HANSA FLEX**

## Características

|  |  |
|--|--|
| Pressão de entrada                       | Max. 12 bar (also for metal tank!)                             |
| Temperatura do fluido                    | max. 60 °C   |
| Temperatura ambiente                     | Max. 60 °C   |
| Dimensão dos poros no elemento filtrante | 5 µm   |
| Material de vedação                      | NBR  |
| Tampa da mola                            | POM-brass  |
| Carcaça                                  | Die-cast zinc  |
| Acessório para gotejamento               | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)           |
| Drain valve                              | Semi-automatic   |
| Medição do valor de fluxo                | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

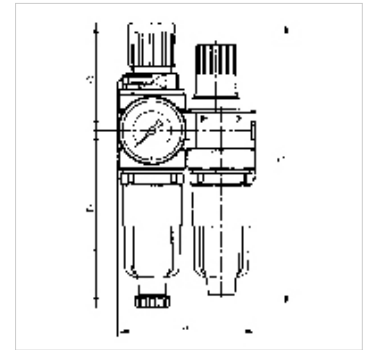

## Nota

Outras indicações a pedido.

## Descrição

Two or three-piece service units consisting of a diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Instruções de encomenda

Lockable service units available on request. If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

## Artigo

| Descrição      | Rosca | Faixa de regulagem | Fluxo (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Tamanho |
|----------------|-------|--------------------|---------------|--------|----------|--------|--------|----|---------|
| K- 07 25 01 26 | G 1/8 | 0.5 - 10 bar       | 700           | 80,0   | 162,0 mm | 63,0   | 99,0   | 5  | 0       |
| K- 07 25 01 28 | G 1/4 | 0.5 - 10 bar       | 700           | 80,0   | 162,0 mm | 63,0   | 99,0   | 5  | 0       |

## Acessório para

|                                |  |
|--------------------------------|--|
| K-HALTERBAUSATZ                | Holder                                       |
| K-AUTOMAT ABLASSVENTIL         | Automatic drain valve                        |
| K-SCHALTTAFELMUTTER            | Nut  |
| K-KOPPELPAKET MEHR             | Coupling packet                              |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter                    |
| K-ERSATZBEHAELTER MULTI MINI   | Spare tank »multifix-mini« & »standard-mini« |
| K-FILTERELEMENT                | Filter element                               |
| K-VERSCHLEI-SATZ               | Set of wearing parts                         |
| K-TROPFAUFSATZ POLYCARBO 1     | Drip attachment polycarbonate                |
| K-TROPFAUFSATZ METALL          | Drip attachment metal                        |