


# K-WTEH 3-TLG PC-BEHÄLTER VARIOBLOC

Service units, 3-piece with polycarbonate bowl

**HANSA FLEX**

## Características

|   |  |
|---|--|
| <b>Pressão de entrada</b>                       | Max. 16 bar (polycarbonate bowl),<br>Max. 20 bar (metal bowl)      |
| <b>Temperatura do fluido</b>                    | max. 50 °C   |
| <b>Temperatura ambiente</b>                     | Max. 50 °C (polycarbonate bowl), Max.<br>80 °C (metal bowl)        |
| <b>Dimensão dos poros no elemento filtrante</b> | 40 µm  |
| <b>Material de vedação</b>                      | NBR  |
| <b>Tampa da mola</b>                            | POM  |
| <b>Carcaça</b>                                  | Die-cast zinc  |
| <b>Membrana</b>                                 | NBR  |
| <b>Acessório para gotejamento</b>               | PA   |
| <b>Drain valve</b>                              | Manual   |
| <b>Medição do valor de fluxo</b>                | At P1 = 10 bar, P2 = 6 bar and<br>pressure drop $\Delta p = 1$ bar |

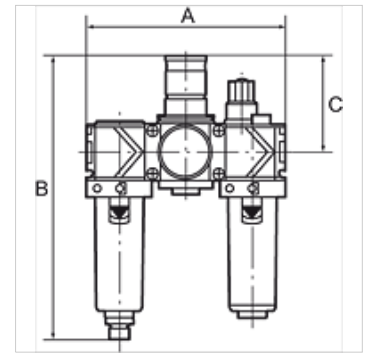

## Nota

Outras indicações a pedido.

## Descrição

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Instruções de encomenda

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Informações adicionais

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## Artigo

| Descrição      | Rosca | Faixa de regulação | Fluxo (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|--------------------|---------------|--------|----------|--------|
| K- 07 25 14 11 | G 1/4 | 0.5 - 10 bar       | 1500          | 144,0  | 201,0 mm | 68,0   |
| K- 07 25 14 13 | G 3/8 | 0.5 - 10 bar       | 1800          | 144,0  | 201,0 mm | 68,0   |
| K- 07 25 14 15 | G 1/2 | 0.5 - 10 bar       | 3400          | 210,0  | 247,0 mm | 98,0   |
| K- 07 25 14 17 | G 3/4 | 0.5 - 10 bar       | 5000          | 210,0  | 247,0 mm | 98,0   |
| K- 07 25 14 19 | G 1   | 0.5 - 10 bar       | 5000          | 264,0  | 247,0 mm | 98,0   |

## Acessório para

|                                 |  |
|---------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC      | Set of wearing parts                           |
| K-FILTERELEMENT VARIOBLOC       | Filter element                                 |
| K-TROPFAUFSATZ VARIOBLOC        | Drip attachment                                |
| K-ERSATZBEHÄLTER VARIOBLOC POLY | Spare tank Polycarbonat                        |
| K-ABLASSVENTIL AUTO             | Fully-automatic drain valve with Adapter G 1/8 |
| K-TROPFAUFSATZ METALL           | Drip attachment metal                          |