


# K-HS RD

Unidirectional banjo valves, pneumatic release, port 2 with female thread

**HANSA FLEX**

## Características

|                       |   |
|-----------------------|---|
| Pressão de trabalho   | 0.3 - 10 bar  |
| Pressão de controle   | 0.5 - 2.5 bar, depending on operating pressure      |
| Temperatura do fluido | max. 60 °C  |
| Posição de montagem   | Qualquer. Anel deve ser posicionado antes do aperto |
| Material              | Latão niquelado                                     |
| Material de vedação   | Perbunan  |

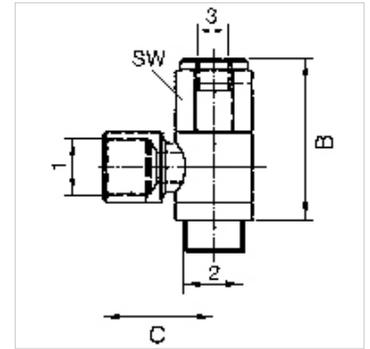

## Nota

Outras indicações a pedido.

## Descrição

For stopping and positioning the cylinder movement: If a control signal is present at port 3 (see drawing), air can flow to and from the cylinder. If no control signal is present, the cylinder exhaust air is shut off by the unidirectional valve. <br>The cylinder is stopped. Releasable unidirectional valves are screwed directly onto the cylinder instead of the normal pipe connections.

## Artigo

| Descrição      | Port 1 | Port 2 | Conexão 3 | B<br>(mm) | C<br>(mm) |
|----------------|--------|--------|-----------|-----------|-----------|
| K- 07 15 07 04 | G 1/8  | G 1/8  | M 5       | 38,0      | 21,5      |
| K- 07 15 07 03 | G 1/4  | G 1/4  | G 1/8     | 43,0      | 25,4      |
| K- 07 15 07 05 | G 3/8  | G 3/8  | G 1/8     | 46,0      | 31,6      |
| K- 07 15 07 02 | G 1/2  | G 1/2  | G 1/8     | 52,0      | 32,0      |