
# K-WKV 2/2 BEIDS SCHNVERSCHR

2/2-way toggle valves, discharge port on both sides, quick-lock screw fitting

## Características

| | |
|---|---|
| **Pressão operacional** | máx. 8 bar |
| **Faixa de temperatura** | 0 °C to +70 °C |
| **Rosca Painel de instrumentos** | M 12 x 0.75 (sheet thickness max. 4 mm) |
| **Peças interiores** | Brass with a bare metal surface |
| **Material de vedação** | NBR |
| **Parafusos oco, braço giratório, alavanca basculante** | Nickel-plated brass |
| **Vedações (imperdíveis)** | Polyamide (glass fibre-reinforced) |



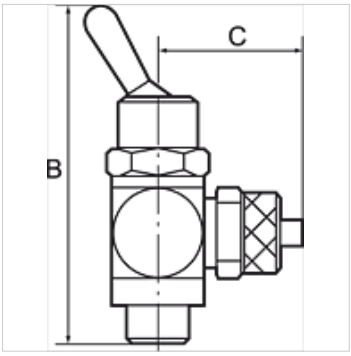


## Nota

Outras indicações a pedido.

## Descrição

Manually operated toggle valves, 2/2 and 3/2-way types. For all applications where compressed air must be switched on or off quickly and easily or a cylinder operated manually. Designed as a banjo-type valve with a hollow bolt and ring piece. Suitable for screwing directly into the equipment or for panel mounting. Compact type of construction, also ideal where space is restricted.

## Artigo

| Descrição | Modelo | C (mm) | para mangueira | Rosca | SW | B (mm) |
|---|---|---|---|---|---|---|
| **K- 07 15 07 10** | 2/2 vias | 16,0 | G 1/8 IG | G 1/8 | 14 mm | 55,0 |
| **K- 07 15 07 11** | 2/2 vias | 25,0 | 5 mm / 3 mm | G 1/8 | 14 mm | 55,0 |
| **K- 07 15 07 12** | 2/2 vias | 25,0 | 6 mm / 4 mm | G 1/8 | 14 mm | 55,0 |
| **K- 07 15 07 13** | 2/2 vias | 25,0 | 8 mm / 6 mm | G 1/8 | 14 mm | 55,0 |
| **K- 07 15 07 06** | 2/2 vias | 22,0 | G 1/4 IG | G 1/4 | 17 mm | 60,0 |
| **K- 07 15 07 08** | 2/2 vias | 26,5 | 6 mm / 4 mm | G 1/4 | 17 mm | 60,0 |
| **K- 07 15 07 09** | 2/2 vias | 27,5 | 8 mm / 6 mm | G 1/4 | 17 mm | 60,0 |
| **K- 07 15 07 07** | 2/2 vias | 28,5 | 10 mm / 8 mm | G 1/4 | 17 mm | 60,0 |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*