# K-KURZH ZYL DOPPELW ACP


Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

## Características

| | |
|---|---|
| **Fluidos** | Filtered compressed air, lubricated (ensure continuity) or unlubricated |
| **Pressão operacional** | máx. 10 bar |
| **Pressão de resposta** | 0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80) |
| **Faixa de temperatura** | -10 °C to +80 °C |
| **Haste do êmbolo** | C45 steel, hard chrome-plated |
| **Tubo** | Aluminium alloy, anodised |
| **Diâmetro da cabeça** | Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium |
| **Êmbolo** | Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/PTFE |
| **Vedação da haste do êmbolo** | NBR (additional charge for PU and FKM) |
| **Vedação do êmbolo** | NBR (additional charge for PU and FKM) |



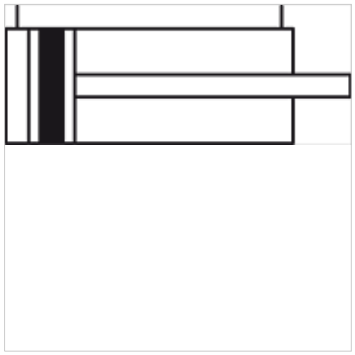

## Nota

Outras indicações a pedido.

## Descrição

Suitable for installation in limited spaces, with magnet.

## Informações adicionais

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

## Artigo

| Descrição | Ø Êmbolo | Curso (mm) | Conexão | Rosca interna Haste do êmbolo |
|---|---|---|---|---|
| **K- 07 15 11 31** | 12 mm | 5 | M 5 | M 3 |
| **K- 07 15 11 32** | 12 mm | 10 | M 5 | M 3 |
| **K- 07 15 11 33** | 12 mm | 25 | M 5 | M 3 |
| **K- 07 15 11 34** | 12 mm | 30 | M 5 | M 3 |
| **K- 07 15 11 35** | 12 mm | 40 | M 5 | M 3 |
| **K- 07 15 11 36** | 16 mm | 5 | M 5 | M 5 |
| **K- 07 15 11 37** | 16 mm | 10 | M 5 | M 5 |
| **K- 07 15 11 38** | 16 mm | 25 | M 5 | M 5 |
| **K- 07 15 11 39** | 16 mm | 30 | M 5 | M 5 |
| **K- 07 15 11 40** | 16 mm | 40 | M 5 | M 5 |
| **K- 07 15 11 41** | 20 mm | 5 | M 5 | M 5 |
| **K- 07 15 11 42** | 20 mm | 10 | M 5 | M 5 |
| **K- 07 15 11 43** | 20 mm | 25 | M 5 | M 5 |
| **K- 07 15 11 44** | 20 mm | 30 | M 5 | M 5 |
| **K- 07 15 11 45** | 20 mm | 40 | M 5 | M 5 |
| **K- 07 15 11 46** | 20 mm | 50 | M 5 | M 5 |
| **K- 07 15 11 47** | 25 mm | 5 | G 1/8 | M 5 |
| **K- 07 15 11 48** | 25 mm | 10 | G 1/8 | M 5 |
| **K- 07 15 11 49** | 25 mm | 25 | G 1/8 | M 5 |
| **K- 07 15 11 50** | 25 mm | 30 | G 1/8 | M 5 |
| **K- 07 15 11 51** | 25 mm | 40 | G 1/8 | M 5 |
| **K- 07 15 11 52** | 25 mm | 50 | G 1/8 | M 5 |
| **K- 07 15 11 53** | 32 mm | 5 | G 1/8 | M 6 |
| **K- 07 15 11 54** | 32 mm | 10 | G 1/8 | M 6 |
| **K- 07 15 11 55** | 32 mm | 25 | G 1/8 | M 6 |
| **K- 07 15 11 56** | 32 mm | 30 | G 1/8 | M 6 |
| **K- 07 15 11 57** | 32 mm | 40 | G 1/8 | M 6 |
| **K- 07 15 11 58** | 32 mm | 50 | G 1/8 | M 6 |
| **K- 07 15 11 59** | 40 mm | 5 | G 1/8 | M 6 |
| **K- 07 15 11 60** | 40 mm | 10 | G 1/8 | M 6 |
| **K- 07 15 11 61** | 40 mm | 25 | G 1/8 | M 6 |
| **K- 07 15 11 62** | 40 mm | 30 | G 1/8 | M 6 |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*

# K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

## Artigo

| Descrição | Ø Êmbolo | Curso (mm) | Conexão | Rosca interna Haste do êmbolo |
|---|---|---|---|---|
| **K- 07 15 11 63** | 40 mm | 40 | G 1/8 | M 6 |
| **K- 07 15 11 64** | 40 mm | 50 | G 1/8 | M 6 |
| **K- 07 15 11 65** | 50 mm | 5 | G 1/8 | M 8 |
| **K- 07 15 11 66** | 50 mm | 10 | G 1/8 | M 8 |
| **K- 07 15 11 67** | 50 mm | 25 | G 1/8 | M 8 |
| **K- 07 15 11 68** | 50 mm | 30 | G 1/8 | M 8 |
| **K- 07 15 11 69** | 50 mm | 40 | G 1/8 | M 8 |
| **K- 07 15 11 70** | 50 mm | 50 | G 1/8 | M 8 |
| **K- 07 15 11 71** | 50 mm | 70 | G 1/8 | M 8 |
| **K- 07 15 11 72** | 63 mm | 5 | G 1/8 | M 8 |
| **K- 07 15 11 73** | 63 mm | 10 | G 1/8 | M 8 |
| **K- 07 15 11 74** | 63 mm | 25 | G 1/8 | M 8 |
| **K- 07 15 11 75** | 63 mm | 30 | G 1/8 | M 8 |
| **K- 07 15 11 76** | 63 mm | 40 | G 1/8 | M 8 |
| **K- 07 15 11 77** | 63 mm | 50 | G 1/8 | M 8 |
| **K- 07 15 11 78** | 63 mm | 70 | G 1/8 | M 8 |
| **K- 07 15 11 79** | 80 mm | 5 | G 1/4 | M 10 |
| **K- 07 15 11 80** | 80 mm | 10 | G 1/4 | M 10 |
| **K- 07 15 11 81** | 80 mm | 25 | G 1/4 | M 10 |
| **K- 07 15 11 82** | 80 mm | 30 | G 1/4 | M 10 |
| **K- 07 15 11 83** | 80 mm | 40 | G 1/4 | M 10 |
| **K- 07 15 11 84** | 80 mm | 50 | G 1/4 | M 10 |
| **K- 07 15 11 85** | 80 mm | 70 | G 1/4 | M 10 |
| **K- 07 15 11 86** | 80 mm | 100 | G 1/4 | M 10 |

## Acessórios

| | |
|---|---|
| **K-MAGNETSENSOREN-REED** | Reed magnetic sensor (incl. 2.5 m cable) |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*