


# K-FI AK KOH METALLBEHAEL MULTIFIX

Activated carbon filters with metal bowl

**HANSA FLEX**

## Características

Pressão de entrada	Max. 16 bar
Temperatura do fluido	max. 60 °C
Temperatura ambiente	Max. 60 °C
Material de vedação	NBR
Elemento do filtro	Activated carbon-POM
Carcaça	Die-cast zinc
Drain valve	Semi-automatic
Teor de óleo residual	0.005 mg/m3
Medição do valor de fluxo	FA at P1 = 6 bar and $\Delta p = 0.2$ bar

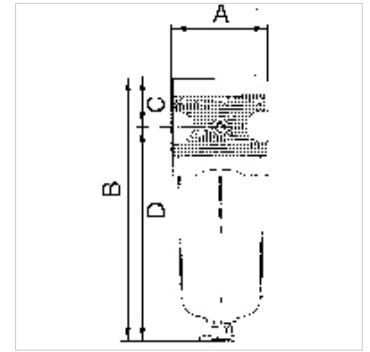

## Nota

Outras indicações a pedido.

## Descrição

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

## Artigo

Descrição	Rosca	Fluxo (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Tamanho
K- 07 25 10 49	G 1/4	380	47,8	137,0 mm	27,0	110,0	6	1
K- 07 25 10 52	G 1/2	1500	68,8	168,2 mm	34,5	133,7	15	2

## Acessório para

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler