


# K-DRG TRINKWASSER

Pressure regulators for drinking water (without DVGW appr.), high outlet pressure (max. 12 bar)

**HANSA FLEX**

## Características

|                                |   |
|--------------------------------|---|
| <b>Pressão de entrada</b>      | Max. 16 bar (low-pressure type), Max. 25 bar (high-pressure type)   |
| <b>Pressão prévia</b>          | Min. 1.2 bar (low-pressure type), Max. 2.5 bar (high-pressure type)   |
| <b>Quedas de pressão mín.</b>  | 1 bar   |
| <b>Temperatura operacional</b> | Max. 75 °C  |
| <b>Vedações</b>                | NBR-SBR   |
| <b>Tampa da mola</b>           | Plastic PA 6 (up to DN 32, low-presure type), Hot-pressed brass (up to DN 32, high-pressure type), Cast iron (from DN 40) |
| <b>Carcaça</b>                 | Bronze (Rg5)  |
| <b>Peças interiores</b>        | Plastic, brass, stainless steel   |

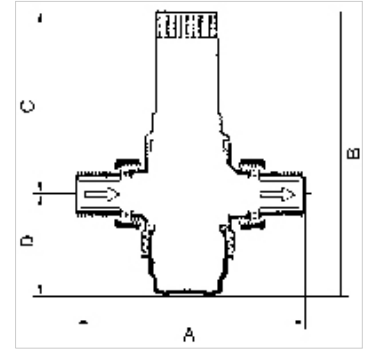

## Nota

Outras indicações a pedido.

## Descrição

Pressure regulator with pressure-reduced single-seated piston valve or single-seated diaphragm valve and built-in strainer. Specially designed for use with water. <br>The device is also suitable for all other applications involving neutral non-sticky liquids, air and neutral non-flammable gases.

## Artigo

| Descrição      | Rosca   | DN | Faixa de regulagem | Fluxo Valor kvs (m <sup>3</sup> /h) | A (mm) | B        | C (mm) | D (mm) |
|----------------|---------|----|--------------------|-------------------------------------|--------|----------|--------|--------|
| K- 07 25 04 45 | R 1/2   | 15 | 1.5 - 12 bar       | 2,9                                 | 137,0  | 177,0 mm | 150,0  | 27,0   |
| K- 07 25 04 46 | R 3/4   | 20 | 1.5 - 12 bar       | 3,9                                 | 141,0  | 177,0 mm | 150,0  | 27,0   |
| K- 07 25 04 47 | R 1     | 25 | 1.5 - 12 bar       | 5,4                                 | 160,0  | 178,5 mm | 150,0  | 28,5   |
| K- 07 25 04 48 | R 1 1/4 | 32 | 1.5 - 12 bar       | 6,1                                 | 177,2  | 234,0 mm | 187,0  | 47,0   |
| K- 07 25 04 49 | R 1 1/2 | 40 | 1.5 - 12 bar       | 12,0                                | 210,0  | 379,0 mm | 320,0  | 59,0   |
| K- 07 25 04 50 | R 2     | 50 | 1.5 - 12 bar       | 13,0                                | 210,0  | 381,0 mm | 320,0  | 61,0   |

## Acessórios

K-KARTUSCHEN Cartridge