


# K-W90 VERBINDER SCHL MS NI

Union elbows

**HANSA FLEX**

## Características

Pressão operacional	Max. 16 bar (at +20 °C)
Temperatura operacional	-20 °C to +70 °C
Material	Latão niquelado
Anel de pressão	Hostaform (black nickel-plated for Ø 10, 12)
O-Ring	NBR, siliconefree
Alicate de aperto	Stainless steel AISI 316

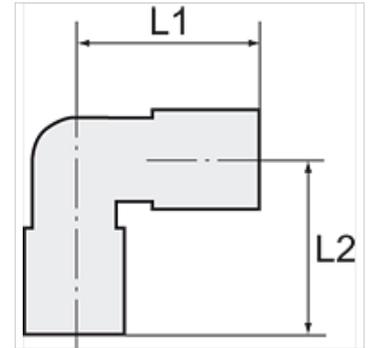

## Nota

Outras indicações a pedido.

## Descrição

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

## Artigo

Descrição	para Ø externo da mangueira	L1 (mm)	L2 (mm)
K- 07 40 29 47	4 mm	17,5	17,5
K- 07 40 29 48	6 mm	19,5	19,5
K- 07 40 29 49	8 mm	23,0	23,0
K- 07 40 29 50	10 mm	25,0	25,0
K- 07 40 29 51	12 mm	27,0	27,0