
K-SCHALLDAE FRUEHWARNFUKT

Silencers with early warning function

Características

Pressão operacional	5 bar
Temperatura operacional	Max. 70 °C
Norma	Rosca BSP conforme DIN EN ISO 228-1
Material	PP



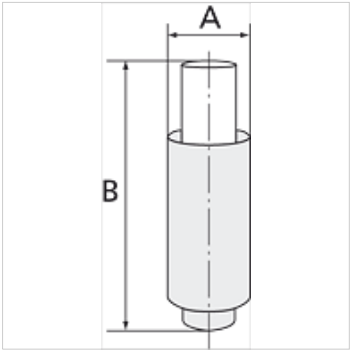

Nota

Outras indicações a pedido.

Descrição

The silencer’s warning indicator gives an early warning if the back pressure in the system is too high. Maintenance personnel can both see and hear (from the elevated sound level) that it is time to replace the silencer before costly and unnecessary disruptions impair operation.
The design is based on a two-chamber system with inner and outer silencing chambers.
The inner diffuser serves as a warning indicator that is pressed out when back pressure is too high.
The silencer should be replaced as soon as the inner diffuser extends far enough to show the red marking on the warning indicator.

Artigo

Descrição	Rosca	A (mm)	B (mm)	Fluxo (L/min)	Nível de ruído (dBA)	Redução de ruído
K- 07 40 15 22	G 1/8 male	15,7	35,5	450	65,5	32 dB(A)
K- 07 40 15 23	G 1/4 male	19,6	42,6	883	66,5	33 dB(A)
K- 07 40 15 24	G 3/8 male	26,8	57,0	1480	73,2	30 dB(A)
K- 07 40 15 25	G 1/2 male	32,4	73,5	1910	76,5	33 dB(A)

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.