
K-T-VB PP
Union tees

Características

Pressão de trabalho	on request
Temperatura operacional	Max. +20 °C
Material	Polipropileno (PP)
Material de vedação	NBR



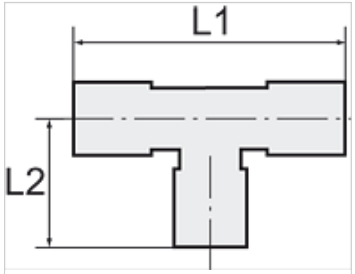

Nota

Outras indicações a pedido.

Descrição

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artigo

Descrição	para Ø externo da mangueira	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.