
K-T-RED VERBINDER POM

Union tees, unequal

Características

Pressão de trabalho	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura operacional	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Poliacetal (POM)
Material de vedação	NBR



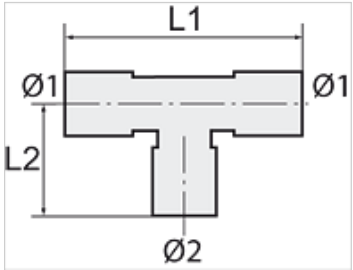

Nota

Outras indicações a pedido.

Descrição

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artigo

Descrição	para Ø1 externo da mangueira (mm)	para Ø2 externo da mangueira (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.