


K-FI MIKRO BIS 60 BAR

Micro-filters for high pressures up to 60 bar

Características

| | |
|--|--|
| Pressão de entrada | Max. 60 bar |
| Temperatura operacional | 0 °C to +90 °C |
| Grau de eficiência | 99.9999 % |
| Dimensão dos poros no elemento filtrante | 0.01 µm |
| Material de vedação | NBR |
| Reservatório | Brass |
| Elemento filtrante | Borosilicate |
| Carcaça | Aluminium |
| Medição do valor de fluxo | At P2 = 6 bar and pressure drop $\Delta p = 0,5$ bar |

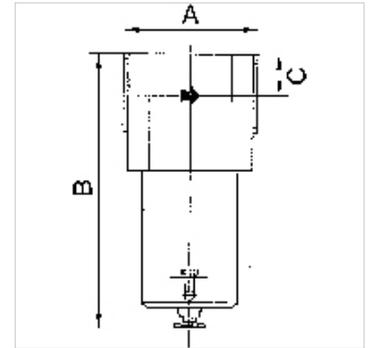

Nota

Outras indicações a pedido.

Descrição

Fine filter for all applications with particularly strict compressed air purity requirements. Micro-filters should always be used in conjunction with a standard filter connected upstream to trap coarse impurities and protect the micro-filter inserts.

Artigo

| Descrição | Rosca | Fluxo (L/min) | A (mm) | B | C (mm) |
|----------------|-------|---------------|--------|----------|--------|
| K- 07 25 06 21 | G 3/8 | 2000 | 73,0 | 187,0 mm | 25,0 |
| K- 07 25 06 22 | G 1/2 | 2000 | 65,0 | 187,0 mm | 25,0 |
| K- 07 25 06 23 | G 3/4 | 2300 | 92,0 | 196,0 mm | 29,0 |
| K- 07 25 06 24 | G 1 | 2300 | 80,0 | 196,0 mm | 29,0 |

Acessórios

K-HALTERBAUSATZ Holder

Acessório para

K-FILTERELEMENT STANDARD Filter element