

# K-TUE IG MS NI

Female stems with parallel female thread - nickel-plated brass



**HANSA FLEX**

## Características

Temperatura operacional Max. 150 °C

Pressão Max. 60 bar

Material Latão niquelado

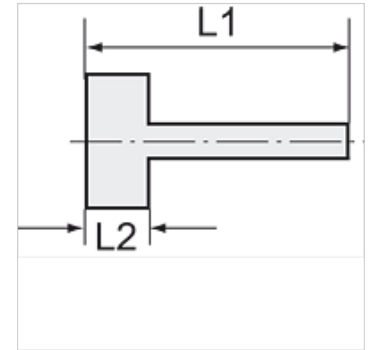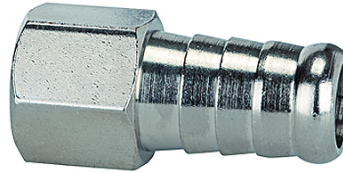

## Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Outras indicações a pedido.

## Descrição

Suitable for air, water, oil, steam, etc.

## Informações adicionais

Further types and dimensions on request.

## Artigo

| Descrição      | Rosca | para mangueira | L1 (mm) | L2 (mm) | SW    |
|----------------|-------|----------------|---------|---------|-------|
| K- 07 40 11 76 | G 1/8 | LW 6 mm        | 28,0    | 8,5     | 12 mm |
| K- 07 40 11 77 | G 1/8 | LW 8 mm        | 28,0    | 8,5     | 12 mm |
| K- 07 40 11 78 | G 1/8 | LW 9 mm        | 28,0    | 8,5     | 12 mm |
| K- 07 40 11 79 | G 1/8 | LW 10 mm       | 28,0    | 8,5     | 12 mm |
| K- 07 40 11 80 | G 1/4 | LW 6 mm        | 33,0    | 10,0    | 15 mm |
| K- 07 40 11 81 | G 1/4 | LW 8 mm        | 33,0    | 10,0    | 15 mm |
| K- 07 40 11 82 | G 1/4 | LW 9 mm        | 33,0    | 10,0    | 15 mm |
| K- 07 40 11 83 | G 1/4 | LW 10 mm       | 33,0    | 10,0    | 15 mm |
| K- 07 40 11 84 | G 1/4 | LW 12 mm       | 33,0    | 10,0    | 15 mm |
| K- 07 40 11 85 | G 3/8 | LW 8 mm        | 35,0    | 12,0    | 19 mm |
| K- 07 40 11 86 | G 3/8 | LW 10 mm       | 35,0    | 12,0    | 19 mm |
| K- 07 40 11 87 | G 3/8 | LW 12 mm       | 35,0    | 12,0    | 19 mm |
| K- 07 40 11 88 | G 3/8 | LW 14 mm       | 35,0    | 12,0    | 19 mm |
| K- 07 40 11 89 | G 1/2 | LW 10 mm       | 38,0    | 14,0    | 25 mm |
| K- 07 40 11 90 | G 1/2 | LW 12 mm       | 41,0    | 14,0    | 25 mm |
| K- 07 40 11 91 | G 1/2 | LW 14 mm       | 41,0    | 14,0    | 25 mm |