


Características

Pressão de trabalho	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura operacional	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Poliacetal (POM)
Material de vedação	NBR

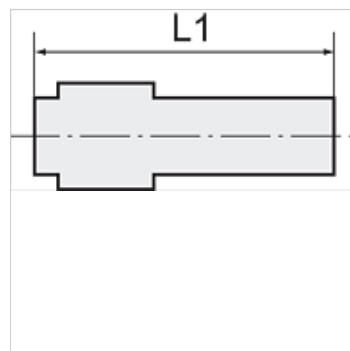

Nota

Outras indicações a pedido.

Descrição

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artigo

Descrição	para Ø externo da mangueira	L1 (mm)	Bocal (mm)
K-07 40 28 91	8 mm	46,7	12
K-07 40 28 92	10 mm	50,9	12
K-07 40 28 93	10 mm	61,2	15
K-07 40 28 94	12 mm	61,2	15
K-07 40 28 95	15 mm	71,7	18
K-07 40 28 96	15 mm	72,7	22
K-07 40 28 97	18 mm	71,8	22
K-07 40 28 98	15 mm	81,4	28
K-07 40 28 99	22 mm	82,6	28