


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Características

Pressão de entrada	Max. 10 bar
Faixa de temperatura	-10 °C to +50 °C
Fluidos	Ar comprimido
Tipo de proteção	IP 65
Pressão de trabalho	0.5 - 8 bar
Interruptor de pressão	Changeover contact
Dimensão dos poros no elemento filtrante	20 µm
Medição do valor de fluxo	At 6,3 bar and $\Delta p = 1$ bar

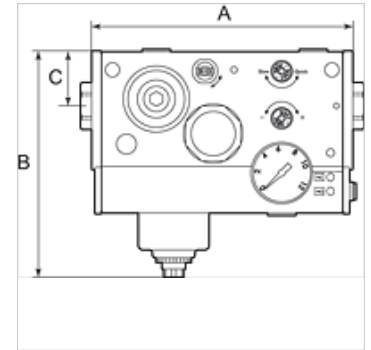

## Nota

Outras indicações a pedido.

## Descrição

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Instruções de encomenda

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Artigo

Descrição	Conexão	Fluxo (L/min)	A (mm)	B	C (mm)	Tensão
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)