
# K-T-STECK VERS DRE AG-K BE 1

Male branch tees, swivel type, conical male thread, coated

## Características

| | |
|---|---|
| **Pressão de trabalho** | Max. 16 bar |
| **Temperatura operacional** | -20 °C to +150 °C |
| **Material** | Latão niquelado |
| **Anel de pressão** | Nickel-plated brass |
| **Anel tensor** | Stainless steel |



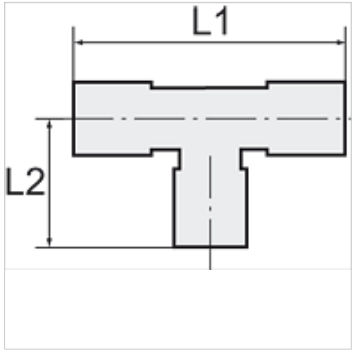


## Nota

Outras indicações a pedido.

## Descrição

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artigo

| Descrição | Rosca | para Ø externo da mangueira | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 28 18** | R 1/8 | 4 mm | 40,0 | 20,0 | 13 mm |
| **K- 07 40 28 19** | R 1/8 | 6 mm | 43,0 | 20,0 | 13 mm |
| **K- 07 40 28 20** | R 1/8 | 8 mm | 47,0 | 20,0 | 13 mm |
| **K- 07 40 28 16** | R 1/4 | 6 mm | 43,0 | 25,0 | 14 mm |
| **K- 07 40 28 17** | R 1/4 | 8 mm | 47,0 | 25,0 | 14 mm |
| **K- 07 40 28 15** | R 1/4 | 10 mm | 53,0 | 26,0 | 16 mm |
| **K- 07 40 28 21** | R 3/8 | 8 mm | 47,0 | 28,0 | 18 mm |
| **K- 07 40 48 02** | R 3/8 | 10 mm | 53,0 | 30,0 | 18 mm |
| **K- 07 40 48 03** | R 3/8 | 12 mm | 58,0 | 32,5 | 20 mm |
| **K- 07 40 48 01** | R 1/2 | 12 mm | 58,0 | 35,5 | 22 mm |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*