

K-VSTO POM
Plugs

Características

Pressão de trabalho	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura operacional	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Poliacetal (POM)
Material de vedação	NBR



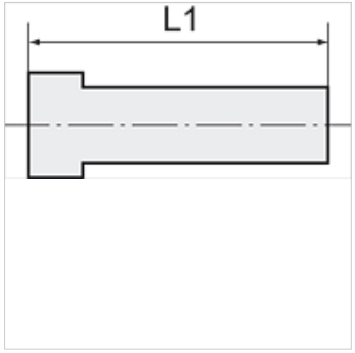

Nota

Outras indicações a pedido.

Descrição

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artigo

Descrição	Cor	L1 (mm)	Bocal (mm)
K- 07 40 29 11	vermelho	28,0	4
K- 07 40 29 12	vermelho	28,0	5
K- 07 40 29 13	vermelho	30,0	6
K- 07 40 29 14	vermelho	31,0	8
K- 07 40 29 15	vermelho	36,5	10
K- 07 40 29 16	vermelho	38,5	12
K- 07 40 29 17	preto	45,0	15
K- 07 40 29 18	preto	41,5	18
K- 07 40 29 19	preto	45,0	22
K- 07 40 29 20	preto	56,0	28

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.