


### Características

|                         |                    |
|-------------------------|--------------------|
| Pressão de trabalho     | on request         |
| Temperatura operacional | Max. +20 °C        |
| Material                | Polipropileno (PP) |
| Material de vedação     | NBR                |

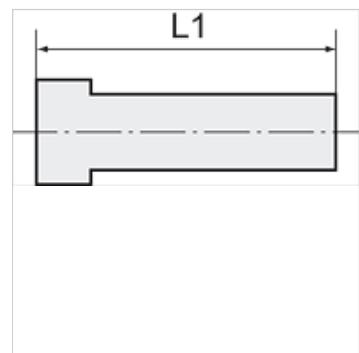

### Nota

Outras indicações a pedido.

### Descrição

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Artigo

| Descrição      | L1<br>(mm) | Bocal<br>(mm) |
|----------------|------------|---------------|
| K- 07 40 29 21 | 102,0      | 32            |