


K-SCHALDAE SINTERBR GE MS

Silencers, sintered bronze, with brass hexagon nut and brass thread

HANSA**FLEX**

Características

Pressão operacional	máx. 10 bar
Temperatura operacional	-10 °C to +200 °C
Nível de ruído 6bar	80 ~ 90 dB(A)

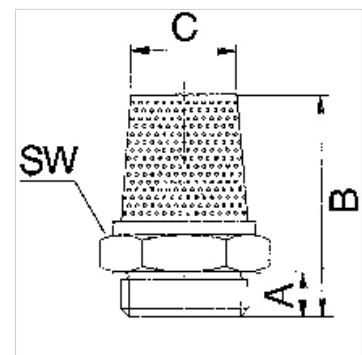

Descrição

For reducing the exhaust noise generated by pneumatic equipment.

Artigo

Descrição	Rosca	A (mm)	B (mm)	C (mm)	SW
K-07 40 35 11	M 5	5,0	20,8	4,0	9 mm
K-07 40 35 12	G 1/8	5,5	22,8	8,0	13 mm
K-07 40 35 13	G 1/4	7,0	33,5	10,0	17 mm
K-07 40 35 14	G 3/8	9,0	41,7	14,0	22 mm
K-07 40 35 15	G 1/2	10,0	48,5	18,0	24 mm