# K-STECKVERSCHR IG SK

Male connectors, parallel female thread with outer hex

## Características

| | |
|---|---|
| **Pressão de trabalho** | Max. 16 bar |
| **Temperatura operacional** | -20 °C to +80 °C |
| **Material** | Latão niquelado |
| **Anel de pressão** | Hostaform |
| **Anel tensor** | Stainless steel |



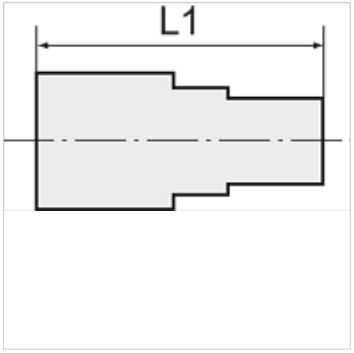


## Nota

Outras indicações a pedido.

## Descrição

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artigo

| Descrição | Rosca | para Ø externo da mangueira | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 25 06** | M 5 | 3 mm | 15,7 | 7 mm |
| **K- 07 40 25 12** | G 1/8 | 4 mm | 26,2 | 10 mm |
| **K- 07 40 25 13** | G 1/8 | 5 mm | 27,5 | 12 mm |
| **K- 07 40 25 14** | G 1/8 | 6 mm | 27,1 | 12 mm |
| **K- 07 40 25 15** | G 1/8 | 8 mm | 28,1 | 13 mm |
| **K- 07 40 25 09** | G 1/4 | 4 mm | 28,6 | 10 mm |
| **K- 07 40 47 15** | G 1/4 | 5 mm | 29,5 | 12 mm |
| **K- 07 40 25 10** | G 1/4 | 6 mm | 29,3 | 12 mm |
| **K- 07 40 25 11** | G 1/4 | 8 mm | 30,0 | 14 mm |
| **K- 07 40 25 08** | G 1/4 | 10 mm | 31,8 | 16 mm |
| **K- 07 40 25 16** | G 3/8 | 10 mm | 36,8 | 16 mm |
| **K- 07 40 25 17** | G 3/8 | 12 mm | 37,0 | 19 mm |
| **K- 07 40 25 07** | G 1/2 | 12 mm | 40,5 | 19 mm |

*Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.*