


K-ABLASSVENTIL AUTO

Fully-automatic drain valve with Adapter G 1/8

HANSA FLEX

Características

| | |
|-------------------------|--|
| Pressão operacional | min. 4 bar, max. 16 bar |
| Fluidos | Condensate (emulsion) |
| Conexão Reservatório | G 1/8 male |
| Temperatura operacional | 0 °C to +90 °C |
| Posição de montagem | Reservatório montado – vertical ± 10% |
| Material | Haube aus Messing, Gehäuse aus Kunststoff (PA) |

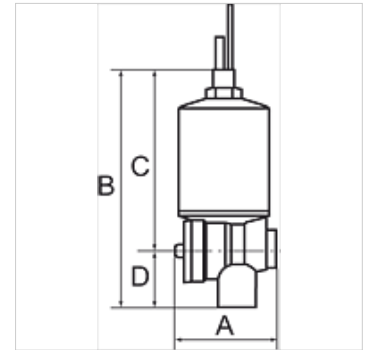

Nota

Outras indicações a pedido.

Descrição

For all size G 1/4 or larger filters, filter regulators, service units and combined units. Not suitable for our miniature Series nor for the »multifix« Series. Easier to mount than the standard manual drain valve.

Artigo

| Descrição | Rosca Lado de descarga | A (mm) | B | C (mm) | D (mm) | DN |
|----------------|------------------------|-----------|----------|-----------|-----------|----|
| K- 07 25 16 13 | G 1/4 female | 46,5 | 109,0 mm | 83,0 | 26,0 | 4 |

é peça sobressalente para os seguintes produtos

| | |
|-------------------------------------|--|
| K-FI REGL PC-BEHAEL MANO VARIOBLOC | Filter regulators with polycarbonate bowl and pressure gauge |
| K-FI REGL METALLBEHAE S MANO VARIOB | Filter regulators with metal bowl, incl. sight glass and pressure gauge |
| K-FI PC-BEHAELTER VARIOBLOC | Filters with polycarbonate bowl |
| K-FI METALLBEHAELTER SICHT VARIBLOC | Filters with metal bowl incl. sight glass |
| K-FI MIKRO PC-BEHAELTER VARIOBLOC | Micro-filters with polycarbonate bowl |
| K-FI MIKRO METALLBEH SICHT VARIOBLO | Micro-filters with metal bowl, incl. sight glass |
| K-WTEH 3-TLG PC-BEHAEL VARIOBLOC | Service units, 3-piece with polycarbonate bowl |
| K-WTEH 3-TLG MET SICH TROPF VARIOBL | Service units, 3-piece with metal bowl, incl. sight glass and metal sight dome |
| K-WTEH 2-TLG PC-BEHAEL VARIOBLOC | Service units, 2-piece with polycarbonate bowl |
| K-WTEH 2-TLG MET SICH TROPF VARIOBL | Service units, 2-piece with metal bowl, incl. sight glass and metal sight dome |
| K-FI REGL PC-BEHAEL H ABLV STANDARD | Filter regulators with polycarbonate bowl and semi-automatic drain valve |
| K-FI REGL PC-BEHAEL S H ABL STANDAR | Filter regulators with polycarbonate bowl, bowl guard and semi-automatic drain valve |
| K-FI REGL METALLBEHAE M ABLV STANDA | Filter regulators with metal bowl and manual drain valve |
| K-FI PC-BEHAELTER H ABLV STANDARD | Filters with polycarbonate bowl and semi-automatic drain valve |
| K-FI PC-BEHAELTER S H ABLV STANDARD | Filters with polycarbonate bowl, bowl guard and semi-automatic drain valve |
| K-FI METALLBEHAELTER M ALV STANDARD | Filters with metal bowl and manual drain valve |
| K-WTEH 2-TLG PC H ABLV STANDARD | Service units with polycarbonate bowl and semi-automatic drain valve |
| K-WTEH 2-TLG PC SCHU H ABL STANDARD | Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve |
| K-WTEH 2-TLG MET M ABLV TRO STANDAD | Service units with metal bowl and manual drain valve, metal sight dome |
| K-WTEH 3-TLG PC H ABLV STANDARD | Service units with polycarbonate bowl and semi-automatic drain valve |
| K-WTEH 3-TLG PC SCHU H ABL STANDARD | Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve |
| K-WTEH 3-TLG MET M ABLV TRO STANDAD | Service units with metal bowl and manual drain valve, metal sight dome |
| K-WTEH KOMBI PC-BEHAELTER S H ABLV | Combination service units with polycarbonate bowl, bowl guard and manual drain valve |