

K-STECKVERSCHR IG SK 1

Male connectors, parallel female thread with outer hex

Características

Pressão de trabalho	Max. 16 bar
Temperatura operacional	-20 °C to +150 °C
Material	Latão niquelado
Anel de pressão	Nickel-plated brass
Anel tensor	Stainless steel



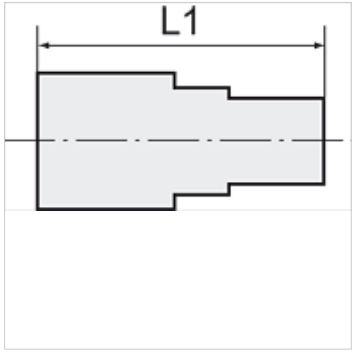

Nota

Outras indicações a pedido.

Descrição

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artigo

Descrição	Rosca	para Ø externo da mangueira	L1 (mm)	SW
K- 07 40 27 46	G 1/8	4 mm	26,5	9 mm
K- 07 40 27 47	G 1/8	6 mm	27,0	11 mm
K- 07 40 27 48	G 1/8	8 mm	28,0	13 mm
K- 07 40 47 71	G 1/4	4 mm	29,5	9 mm
K- 07 40 27 44	G 1/4	6 mm	31,0	11 mm
K- 07 40 27 45	G 1/4	8 mm	32,0	13 mm
K- 07 40 27 43	G 1/4	10 mm	32,0	16 mm
K- 07 40 47 70	G 1/4	12 mm	40,0	20 mm
K- 07 40 47 72	G 3/8	10 mm	37,5	20 mm
K- 07 40 47 73	G 3/8	12 mm	39,5	20 mm

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.