

K-L-STECKVER AG-K

Male elbows, conical male thread

Características

Pressão de trabalho	Max. 16 bar
Temperatura operacional	-20 °C to +80 °C
Material	Latão niquelado
Anel de pressão	Hostaform
Anel tensor	Stainless steel



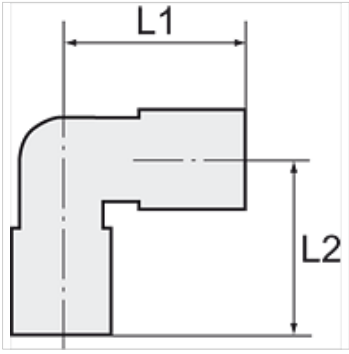

Nota

Outras indicações a pedido.

Descrição

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artigo

Descrição	Rosca	para Ø externo da mangueira	L1 (mm)	L2 (mm)	SW
K- 07 40 25 65	R 1/8	4 mm	18,6	16,0	10 mm
K- 07 40 25 66	R 1/8	6 mm	21,9	16,0	10 mm
K- 07 40 25 67	R 1/8	8 mm	25,4	16,0	10 mm
K- 07 40 25 63	R 1/4	6 mm	21,9	18,5	10 mm
K- 07 40 25 64	R 1/4	8 mm	25,4	18,5	10 mm
K- 07 40 25 62	R 1/4	10 mm	27,2	22,0	14 mm

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.