

K-VST 1
Plugs

HANSA-FLEX

Características

Pressão de trabalho	Max. 16 bar
Temperatura operacional	-20 °C to +80 °C
Material	Latão niquelado



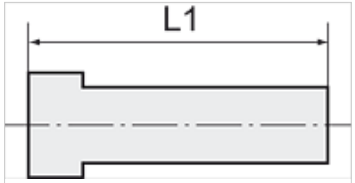

Nota

Outras indicações a pedido.

Descrição

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artigo

Descrição	Niple de encaixe (mm)	L1 (mm)
K- 07 40 26 28	3	20,0
K- 07 40 26 29	4	27,0
K- 07 40 26 30	5	27,0
K- 07 40 26 33	6	29,8
K- 07 40 26 36	8	33,6
K- 07 40 26 37	10	36,8
K- 07 40 26 38	12	39,0
K- 07 40 26 40	14	39,5

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.