
K-BOX CLICK-CLOCK

Boxed set - click-clock

Características

Pressão de trabalho	Max. 16 bar
Temperatura operacional	-20 °C to +80 °C
Material	Latão niquelado
Anel de pressão	Hostaform
O-Ring	NBR
Anel tensor	Stainless steel

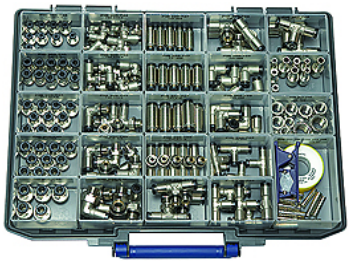

Descrição

45 male connectors G 1/8-4, G 1/8-6, G 1/4-8, G 3/8-8
35 swivel type male elbows G 1/8-4, G 1/8-6, G 1/4-6, G 1/4-8, G 3/8-8
15 unions 4, 6, 8 mm
10 union elbows 6, 8 mm
15 union tees 4, 6, 8 mm
15 swivel type male branch tees G 1/8-6, G 1/4-6, G 1/4-8
9 reducers with push-in plug 8/6, 10/6, 10/8
10 plugs 6, 8 mm
10 sockets G 1/8, G 1/4, G 3/8
1 PTFE-sealing tape
1 hose cutter

Informações adicionais

Further types and dimensions on request.

Artigo

Descrição	Definição
K- 07 40 35 24	Boxed set, >click-clock< Series push-in fittings

Apesar de uma verificação cuidadosa, não podemos excluir a possibilidade de erros e não assumimos qualquer responsabilidade pelos dados aqui contidos.